

High Pressure Plunger Pump P3-45 with pressure feed lubrication

URACA

Integral pressure feed lubrication for P3-45

Inclined pump position - due to kind of installation, location or both. The integral pressure feed lubrication offers additional safety for extremely inclined positions. This option allows to extend the application range of P3-45.

P3-45 - a renowned high performance pump for all inclined positions!

URACA Pumpenfabrik GmbH & Co.KG
Sirchinger Str. 15
D-72574 Bad Urach, Germany
Phone +49 7125 133-0
Fax +49 7125 133-202
info@uraca.de
www.uraca.de


Certified according to:

- DIN EN ISO 9001:2000 by LRQA
- VGB KTA 1401
- AD 2000 - HPO
- Others upon request

Technical data	
Pump type	P3-45
Pressure stage	150 to 250 bar
Flow rate	473 l/min at 150 bar 292 l/min at 250 bar
Power	135 kW
Weight	350 kg

1 bar = 14,5038 psi
1 l = 0,26417 Gal.
1 kW = 1,3410 HP
1 kg = 2,205 lbs

**Additional safety for all
inclined positions!**

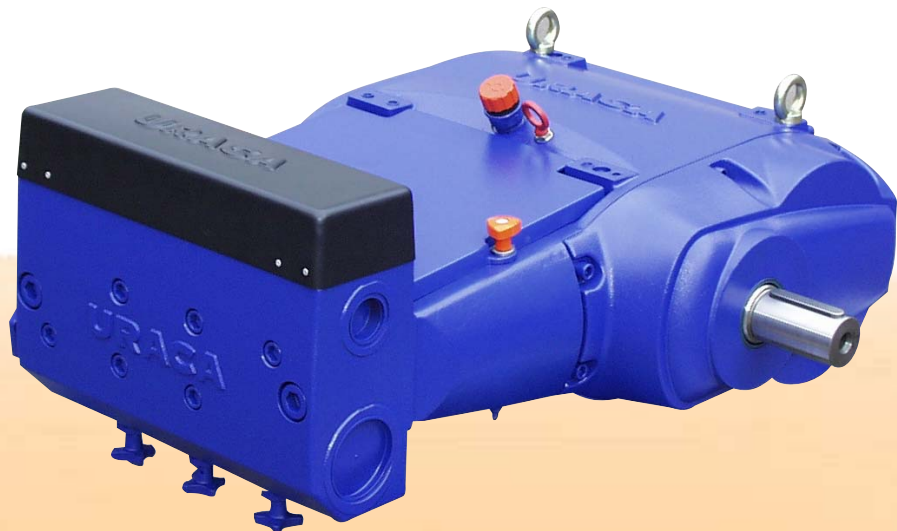

NEW NEW