


RVD250 / RVD500

Revolver nozzle

Flexible multi-purpose operation with round and flat spray nozzles.

With the RVD revolver nozzle, the shape and intensity of the water jet can be changed flexibly and according to the situation.

- Switching between three different nozzles by simply twisting the revolver
- Robust but lightweight
- Efficient and flexible working without additional tools

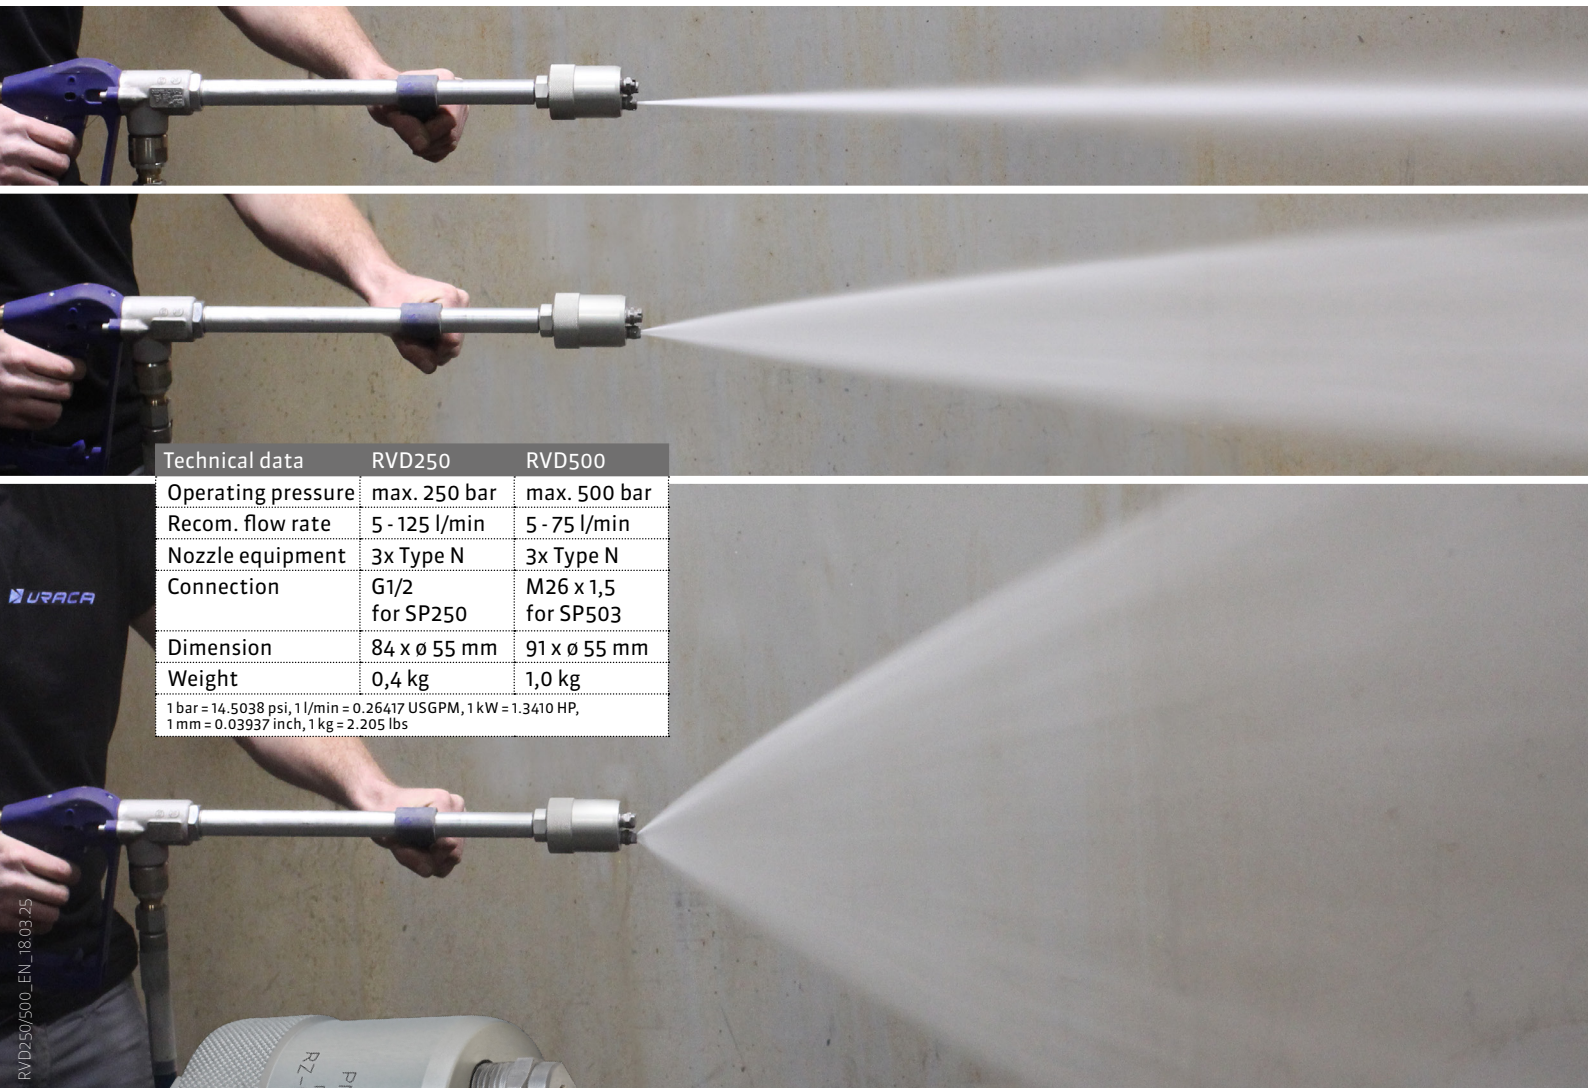

Technical data	RVD250	RVD500
Operating pressure	max. 250 bar	max. 500 bar
Recom. flow rate	5 - 125 l/min	5 - 75 l/min
Nozzle equipment	3x Type N	3x Type N
Connection	G1/2 for SP250	M26 x 1,5 for SP503
Dimension	84 x ø 55 mm	91 x ø 55 mm
Weight	0,4 kg	1,0 kg
<small>1 bar = 14.5038 psi, 1 l/min = 0.26417 USGPM, 1 kW = 1.3410 HP, 1 mm = 0.03937 inch, 1 kg = 2.205 lbs</small>		



High Pressure Technology